

CWPL




IP 65 CLASS I  960°C  



- Body** : made of injected stabilized and UV protected moulded polycarbonate and a gear tray made of trimmed sheet steel, chemically treated surface to corrosion class II by high pressure spraying at 2.5 bar before its finally electro-statically powder coated with a 60 micron thermo-hardened polyurethane powder, stabilized and UV protected.
- Optics** : is made of high temperature Polycarbonate.
- Electrical** : 240v/50Hz supply, 105^o heat resistant PVC wire, 3-P terminal block in polyamide material.
- Options** : different lumens output, wattages, and other variants are available upon request. Please refer to page no 170 for some common variants and add suffix to below model references, wherever applicable.

Model Ref.	LED Lumens/ Wattage	L x W x H (mm)
CWPL60-1160/9.2	1450/8.4	670x385x245
CWPL120-4640/37	5800/33.6	1270x295x245
CWPL150-5632/46.5	7040/42	1570x295x245
CWPL150-6000/60	7500/56	1570x295x245

Note : Lumens & Wattages are subject to change due to the fast developments in LED technology.

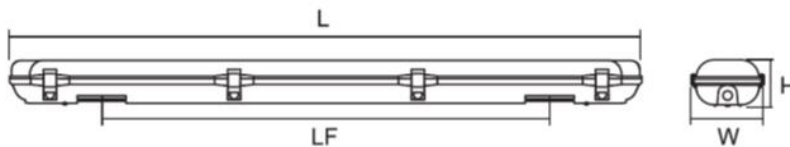

How to Specify :

Surface mounted weather proof fixture with PC body, PMMA diffuser, powder coated gear tray and stainless steel clips- IP66. Similar to Majelite CWP.

