





## BH

### TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminium
Light Source	SMD (SCDM <3)
Color Temperature	3000K/4000K/5000K
Luminous Efficiency	140 Lum/W
CRI	>80
Beam Angle(°)	90 deg
UGR	-
Lifetime(hr)	> 50,000h
Product Finishing	White/Black/Grey



G



H


### FEATURES & BENEFITS

LED Driver	Built-In
Dimming Option	Dali/1-10V
Functions	-
Ingress Protection (IP Rating)	IP65
Impact Resistance (IK Rating)	IK08
Power Factor (PF)	> 0.90

#### Certification



### ACCESSORIES & DIMENSIONS ES

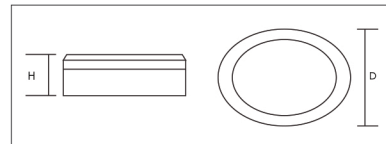

### MODEL REF.

Standard CCT 4000K

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)
BH-18	18W	220-240V AC	275x95	2000	1.8
BH-29	29W	220-240V AC	350x148	3350	2.2

Note: Add suffix for front cover.