




GRLR



IP 20 CLASS I Ⓢ 960°C ⚠ Ⓢ CE Ⓢ 05

86


maJELITE

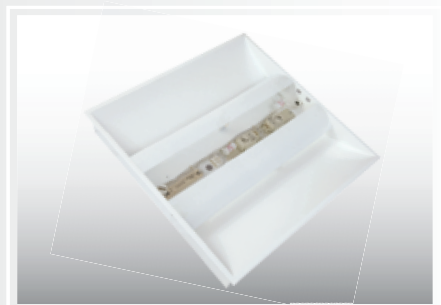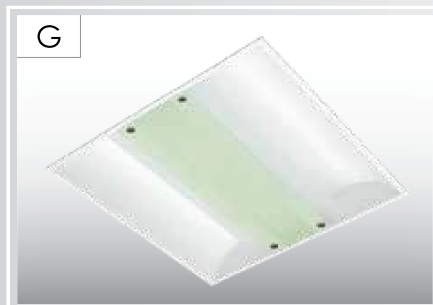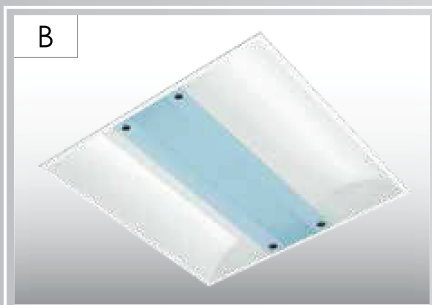

- Body** : in trimmed sheet steel, chemically treated surface to corrosion class II by high pressure spraying at 2.5 bar before its finally electro-statically powder coated with a 60 micron thermo-hardened polyurethane powder, stabilized and UV protected.
- Optics** : made of white concaved metal reflector and a frosted decorative glass diffuser.
- Electrical** : 240v/50Hz supply, 105° heat resistant PVC wire, 3-P terminal block in polyamide material.
- Options** : different optical arrangement , LED options, and other variants are available upon request. Please add suffix to the code for different optical arrangements.

Model Ref.	Lamp(s) Wattage, Holder	L x W x H (mm)
GRLR236	2x36W, 2G11	597x597x90
GRLR255	2x55W, 2G11	597x597x90
GRLR214	2x14W, G5	597x597x90
GRLR314	3x14W, G5	597x597x90

Note : Fittings can be supplied with Magnetic/Electronic/Dimmable ballasts and emergency conversion kits upon request. Please refer to page No. 170 for some common variants.

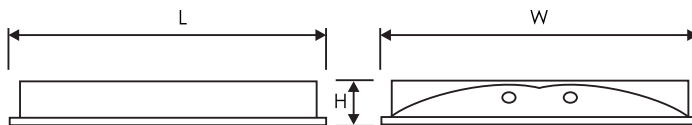


Room Reflectance			Model GRLR314									
C	W	F	Room Index									
			0.75	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	
0.7	0.5	0.2	0.34	0.38	0.43	0.46	0.50	0.53	0.55	0.58	0.59	
0.7	0.3	0.2	0.28	0.34	0.38	0.41	0.46	0.50	0.52	0.55	0.57	
0.7	0.1	0.2	0.24	0.30	0.35	0.38	0.43	0.47	0.49	0.53	0.55	
0.5	0.5	0.2	0.31	0.37	0.41	0.44	0.48	0.51	0.53	0.55	0.57	
0.5	0.3	0.2	0.27	0.33	0.37	0.41	0.45	0.48	0.50	0.53	0.55	
0.5	0.1	0.2	0.24	0.30	0.34	0.38	0.42	0.46	0.48	0.51	0.54	
0.3	0.5	0.2	0.31	0.36	0.40	0.43	0.46	0.49	0.51	0.53	0.55	
0.3	0.3	0.2	0.27	0.32	0.37	0.40	0.44	0.47	0.49	0.52	0.53	
0.3	0.1	0.2	0.24	0.30	0.34	0.37	0.42	0.45	0.47	0.50	0.52	
0.0	0.0	0.0	0.23	0.28	0.32	0.35	0.40	0.42	0.45	0.47	0.49	

LOR=56.8% , DLOR=56.8%, ULOR=0.0%, SHR NOM=1.25, SHR MAX=1.45, SHR TR=1.61,
 UF tables for other lamp wattage are available upon request.

How to Specify :

Recessed modular fitting made of Zinc and powder coated steel with double concaved back reflector similar to Majelite GRLR.....

Luminous Intensity Distribution

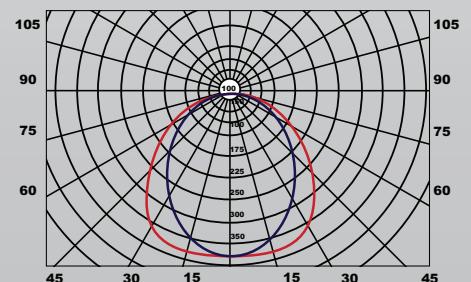

Luminous intensity (cd/klm) in level C 0° - 180°
 Luminous intensity (cd/klm) in level C 90° - 270°