



HWL




IP 66 CLASSI Ⓢ 960°C ⚡ Ⓢ CE

152

*maJELITE*

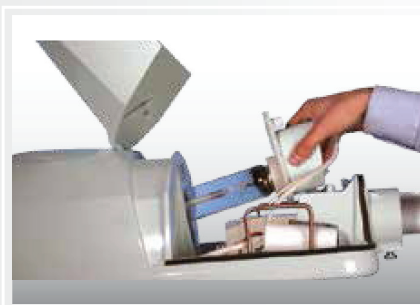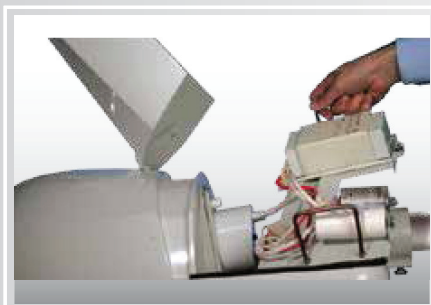

- Body** : made of high pressure die-cast A360 aluminum alloy finished to corrosion class III by high pressure spraying at 2.5 bar before its finally electro-statically powder coated with a 60 micron thermo-hardened polyester powder, stabilized and UV protected.
- Optics** : is made of 99.85 % pure anodized aluminum reflector and protected by a toughened glass cover with breathing valve.
- Design** : Two compartment construction housing separating the optical compartment from the gear compartment
- Electrical** : 240v/50Hz supply, 180° silicone heat resistant wire, 3-P terminal block in ceramic material.
- Options** : different optical arrangement , LED options, and other variants are available upon request.

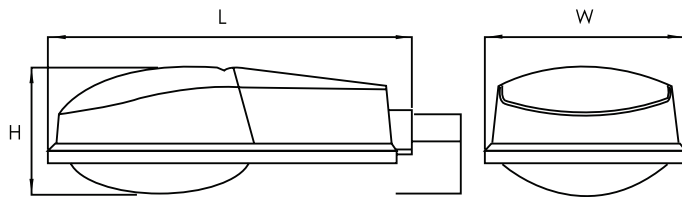

Model Ref.	Lamp(s) Wattage, Holder	L x W x H (mm)
HWL250H	250W, Halide, E40	738x388x263
HWL250S	250W, Sodium, E40	738x388x263
HWL400H	400W, Halide, E40	738x388x263
HWL400S	400W, Sodium, E40	738x388x263
HWL600S	600W, Sodium, E40	738x388x263


## How to Specify :

Road light made of cast aluminum body with two separate compartments, removable gear tray wide beam reflector IP 66 optical IP 65 gear compartment. Similar to Majelite HWL.....

**MAJELITE**

153

Luminous Intensity Distribution

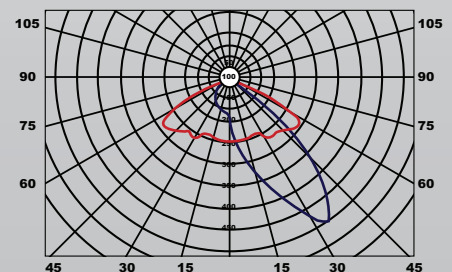

Luminous intensity (cd/klm) in level C 0° - 180°  
Luminous intensity (cd/klm) in level C 90° - 270°