



# IPDL

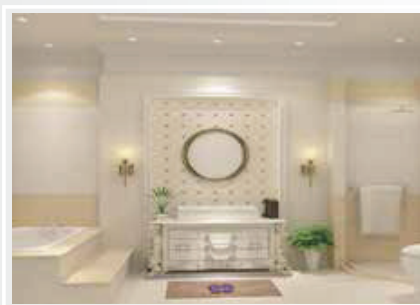

IP65 CLASS I  960°C   

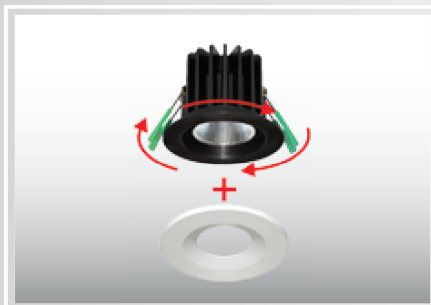

- Body** : made of high pressure die cast aluminum alloy, chemically treated surface to corrosion class II by high pressure spraying at 2.5 bar before its finally electro-statically powder coated with a 60 micron thermo-hardened polyurethane powder, stabilized and UV protected.
- Optics** : made of high purity anodized specular spun aluminum, round white reflector, and glare control diffuser.
- Electrical** : 240v/50Hz supply, 105° heat resistant PVC wire, 3- P terminal block in polyamide material
- Options** : different lumens output, wattages, an are availbled other varints on request. Please refer to page 170 for common varints and add suffix to below standard models references wherever applicable

Model Ref.	LED Lumens / Wattage	D x H (mm)
IPDL-615/5	615/5	88x72
IPDL750/7	750/7	88x72
IPDL960/8.7	960/8.7	88x72

**Note** : Lumens & Wattages are subject to change due to the fast developments in LED technology.




## How to Specify :

88mm IP65 fire rated Recessed downlight with cast Aluminum deep frame and glare control diffuser with side latching high tensile springs

**MAJELITE**

55

Luminous Intensity Distribution

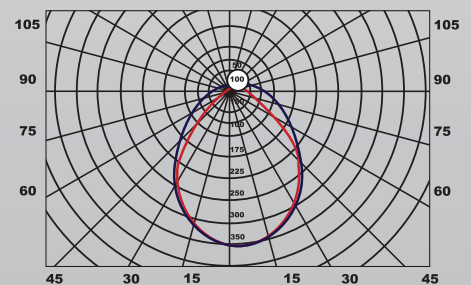

Luminous intensity (cd/klm) in level C 0° - 180°  
Luminous intensity (cd/klm) in level C 90° - 270°