


ODS



IP40 CLASS I Ⓢ 960°C ⚡ Ⓢ Ⓢ Ⓢ

30

maJELITE

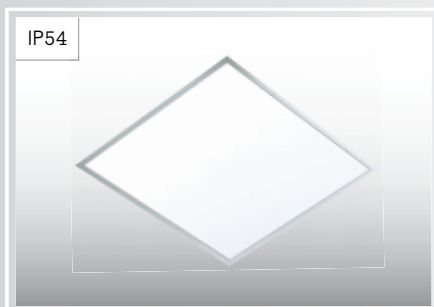


- Body** : in trimmed sheet steel, chemically treated surface to corrosion class II by high pressure spraying at 2.5 bar before its finally electro-statically powder coated with a 60 micron thermo-hardened polyurethane powder, stabilized and UV protected.
- Optics** : made of high temperature UV stabilized PMMA 3-layer material. Excellent optical characteristics with high transmission, diffusion rate, special micro embossing, and free static treatment.
- Electrical** : 240v/50Hz supply, 105^o heat resistant PVC wire, 3-P terminal block in polyamide material.
- Options** : different dimensions, lumens output, wattages, extruded aluminum housing and other variants are available upon request. Please refer to page no 170 for some common variants and. add suffix to below model references wherever applicable.

How to Specify :

620x620mm Recessed modular fitting made of trimmed sheet steel, powder coated to corrosion class II, with separated micro embossing 3-layer LED diffusers.

Model Ref.	LED Lumens / Wattage	L x W x H (mm)
ODS3030-1170/9.8	1530/8.9	300x300x90
ODS6060-4682/39	6120/35.6	620x620x90
ODS30120-4682/39	6120/35.6	1220x300x90
ODS30150-5852/49	7650/44.5	1520x300x90


Note : Lumens & Wattages are subject to change due to the fast developments in LED technology.



MAJELITE

31

Luminous Intensity Distribution

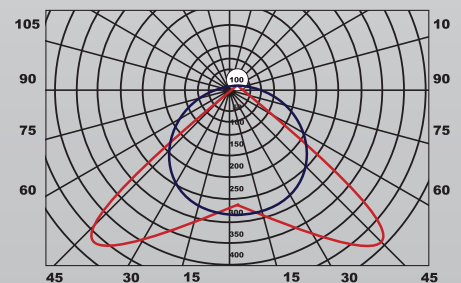

Luminous intensity (cd/klm) in level C 0° - 180
Luminous intensity (cd/klm) in level C 90° - 270