


# ORDL




IP 40 CLASSI Ⓢ 960°C ⚡ Ⓢ CE

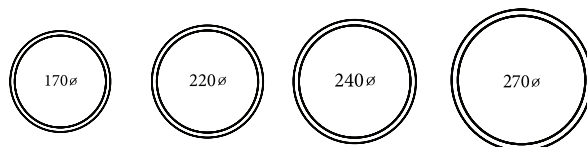

- Body** : made of high pressure die cast aluminum alloy, chemically treated surface to corrosion class II by high pressure spraying at 2.5 bar before its finally electro-statically powder coated with a 60 micron thermo-hardened polyurethane powder, stabilized and UV protected.
- Optics** : made of high purity anodized specular spun aluminum reflector special micro embossing, diffuser with free static treatment..
- Electrical** : 240v/50Hz supply, 105° heat resistant PVC wire, 3-Pterminal block in polyamide material
- Options** : different lumens output, wattages, an are available on request. Please refer to page 170 for common variants and add suffix to below standard model references wherever applicable.

Model Ref.	LED Lumens / Wattage	D x H x RC (mm)
ORDL17-1230/9.70	1367/8.8	170x119x160
ORDL17-1795/14	1994/12.8	170x119x160
ORDL22-2693/21	2992/19.2	170x119x160
ORDL22-3590/28	3989/25.6	220x135x210
ORDL24-4490/35	4989/32	240x140x230
ORDL27-5384/42	5983/38.3	270x178x260

**Note** : Lumens & Wattages are subject to change due to the fast developments in LED technology.




## How to Specify :

Recessed downlight with cast Aluminum frame, PC shell with specular spun aluminum reflector, and glass shield.

**MAJELITE**

59

Luminous Intensity Distribution

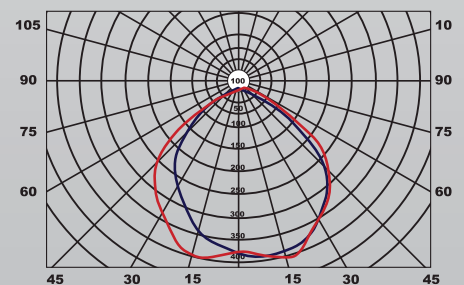

Luminous intensity (cd/klm) in level C 0° - 180°  
Luminous intensity (cd/klm) in level C 90° - 270°