


RLL-C



IP 65 CLASS I  960°C  


RLL-S



RLL-G




IP67



- Body** : made of 6063 extruded and anodized aluminum alloy.
- Optics** : excellent luminous transmittance and high of optical efficiency PC / Silicone lenses with self sealing ability, high thermal stability, UV resistant. IK08 /IK10, IP65.
- Electrical** : 240v/50Hz supply, 180^o heat resistant silicone wires, 3-P terminal block in polymade material.
- Options** : different lumens output, wattages, luminous distribution beam angles and other variants are available upon request. Please refer to page no 170 for some common variants and add suffix to below model references, wherever applicable.

Model Ref.	LED Lumens / Wattage	L x W x H (mm)
RLL-C-7600/60	8020 / 54	350 X 260X 100
RLL-C-15240/120	16040/ 108	550 X 260X 100
RLL-C-22860/180	24060 / 162	750 X 260X 100
RLL-S-10400/90	11000 / 82	500 X 260X 100
RLL-S-15500/135	16300 / 123	550 X 260X 100
RLL-S-26000/225	28600 / 205	600 X 260X 100
RLL-S-31100/270	34100 / 246	650 X 260X 100
RLL-G-16200/164	18000 / 148	665 X 340X 160
RLL-G-8100/82	9000 / 74	665 X 340X 160

Note : Lumens & Wattages are subject to change due to the fast developments in LED technology.

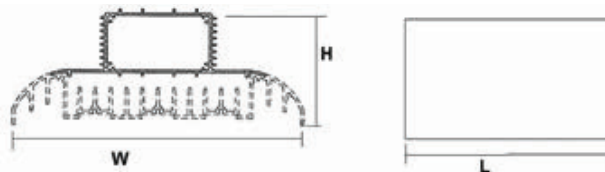


How to Specify :

..... lumens/watt Street Light made of 6063 extruded alloy with separate dual heat dissipation system for extreme temperature conditions. IK08, IP65

MAJELITE

69

Luminous Intensity Distribution

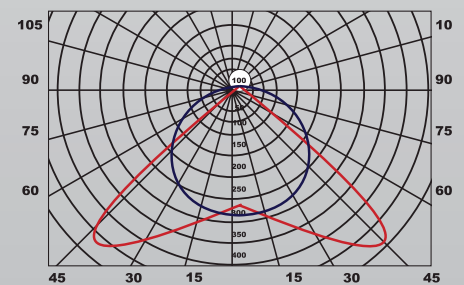

Luminous intensity (cd/klm) in level C 0° – 180
Luminous intensity (cd/klm) in level C 90° – 270