


# RSPD



IP 40 CLASSI Ⓢ 960°C ⚡ Ⓢ Ⓢ CE

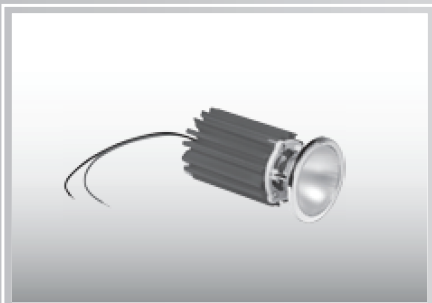

- Body** : made of high pressure die cast aluminum alloy, chemically treated surface to corrosion class II by high pressure spraying at 2.5 bar before its finally electro-statically powder coated with a 60 micron thermo-hardened polyurethane powder, stabilized and UV protected.
- Optics** : made of high purity anodized specular spun aluminum, round white reflector, and glare control diffuser.
- Electrical** : 240v/50Hz supply, 105<sup>o</sup> heat resistant PVC wire, 3- P terminal block in polyamide material
- Options** : different lumens output, wattages, an are availbled other varints on request. Please refer to page 170 for common variants and add suffix to below standard models reference, wherever applicable.

Model Ref.	LED Lumens / Wattage	D x H x RC (mm)
RSPD-615/5	615/5	80x80x70
RSPD-750/7	750/7	80x80x70
RSPD-960/8.7	960/8.7	80x80x70
RSPD-1160/10.6	1160/ 10.6	80x100x70
RSPD-1300/12.5	1300/ 12.5	80x100x70

**Note** : Lumens & Wattages are subject to change due to the fast developments in LED technology.




## How to Specify :

80mm Recessed downlight with cast Aluminum deep frame and glare control dif-fuser with side latching high tensile springs

**MAJELITE**

49

Luminous Intensity Distribution

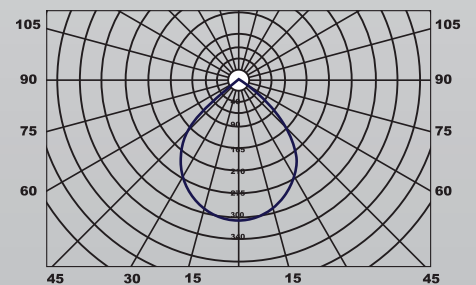

Luminous intensity (cd/klm) in level C 0° - 180°  
Luminous intensity (cd/klm) in level C 90° - 270°