

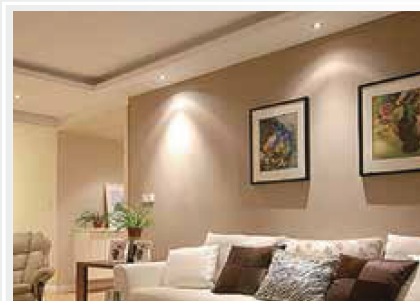


SSPD

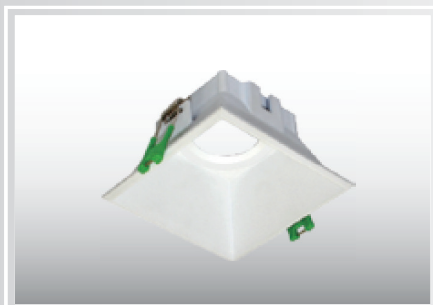


IP 40 CLASSI Ⓢ 960°C ⚡ Ⓢ Ⓢ CE

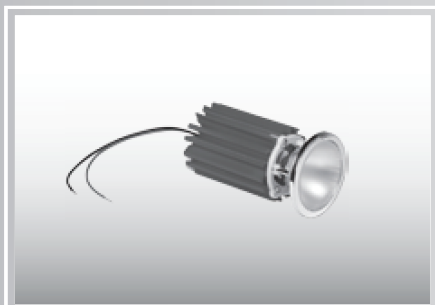

- Body** : made of high pressure die cast aluminum alloy, chemically treated surface to corrosion class II by high pressure spraying at 2.5 bar before its finally electro-statically powder coated with a 60 micron thermo-hardened polyurethane powder, stabilized and UV protected.
- Optics** : made of high purity anodized specular spun aluminum, round white reflector, and glare control diffuser.
- Electrical** : 240v/50Hz supply, 105^o heat resistant PVC wire, 3- P terminal block in polyamide material
- Options** : different lumens output, wattages, an are availbled other varints on request. Please refer to page 170 for common variants and add suffix to below standard models references, wherever applicable.

Model Ref.	LED Lumens / Wattage	L x W x H x RC (mm)
SSPD-615/5	615/5	90x90x80x75
SSPD-750/7	750/7	90x90x80x75
SSPD-960/8.7	960/8.7	90x90x80x75
SSPD-1160/10.6	1160/ 10.6	90x90x100x75
SSPD-1300/12.5	1300/ 12.5	90x90x100x75


Note : Lumens & Wattages are subject to change due to the fast developments in LED technology.



How to Specify :

90X90mm Recessed down-light with cast Aluminum deep frame and glare control diffuser with side latching high tensile springs

Luminous Intensity Distribution

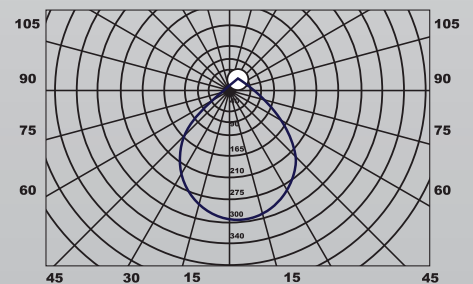

Luminous intensity (cd/klm) in level C 0° - 180°
Luminous intensity (cd/klm) in level C 90° - 270°