


VML




IP 44 CLASS I Ⓢ 960°C ⚡ Ⓢ CE

116

maJELITE

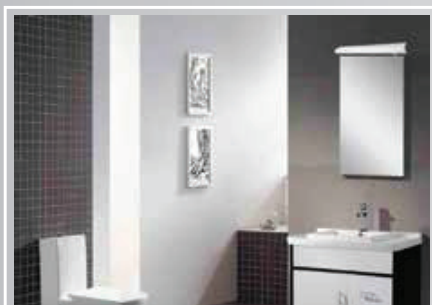

- Body** : made of Extruded Aluminum Alloy with PC end caps and a gear tray made of 0.7mm trimmed sheet steel, surface chemically treated to corrosion class II by high pressure spraying at 2.5 bar before its finally electrostatic ally powder coated with 60 micron thermo-hardened polyurethane powder, stabilized and UV protected.
- Optics** : made of stabilized extruded Polycarbonate Striped Diffuser and end caps.
- Electrical** : 240v/50Hz supply, with ON/OFF power switch 105^o heat resistant PVC wire, 3-P terminal block in polyamide material.
- Options** : LED options and other variants are available upon request. Please add suffix SS to the code if power socket is also required.

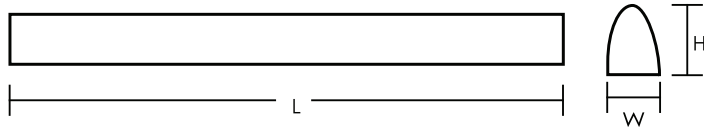

How to Specify :

Surface mounted mirror lightfitting made of Zinc and powder coated steel with PC curved diffuser. Similar to Majelite VML.....

Model Ref.	Lamp(s) Wattage, Holder	L x W x H (mm)
VML118	1x18W,G13	620x65x75
VML114	1x14W,G5	620x65x75
VML136	1x36W,G13	1220x65x75
VML128	1x28W,G5	1220x65x75

Note : Fittings can be supplied with Magnetic/Electronic/Dimmable ballasts ,and emergency conversion kits upon request.