



VML



IP 44 CLASS I Ⓢ 960°C ⚡ Ⓢ CE

42

maJELITE

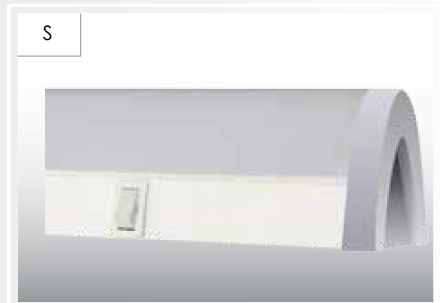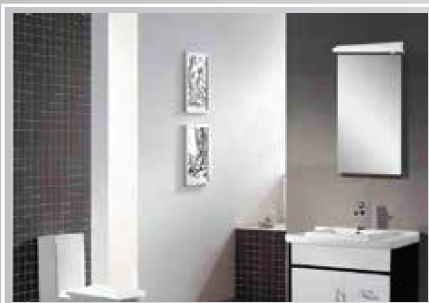

- Body** : made of Extruded Aluminum Alloy with PC end caps and a gear tray made of 0.7mm trimmed sheet steel, surface chemically treated to corrosion class II by high pressure spraying at 2.5bar before its finally elec-trostatic ally powder coated with 60 micron thermo-hardened polyurethane powder, stabilized and UV protected.
- Optics** : made of stabilized extruded Polycarbonate Striped Diffuser and end caps.
- Electrical** : 240v/50Hz supply, 105^o heat resistant PVC wire, 3-P terminal block in polyamide material.
- Options** : different lumens output, wattages, and other variants are available upon request. Please refer to page no 170 for some common variants and add suffix to below model references, wherever applicable.

How to Specify :

Surface mounted mirror lightfitting made of Zinc and powder coated steel with PC curved diffuser. Similar to Majelite VML.....

Model Ref.	LED Lumens/ Wattage	L x W x H (mm)
VML60-2320/18	2900/16.4	580x65x75
VML120-4640/36	5800/32.8	1140x65x75
VML150-5808/45	7260/41	1420x65x75

Note : Lumens & Wattages are subject to change due to the fast developments in LED technology.

