
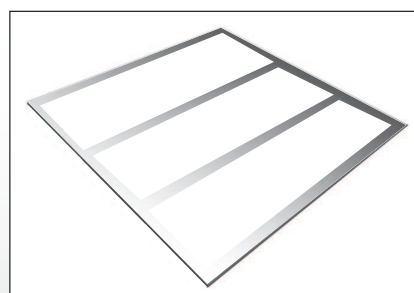
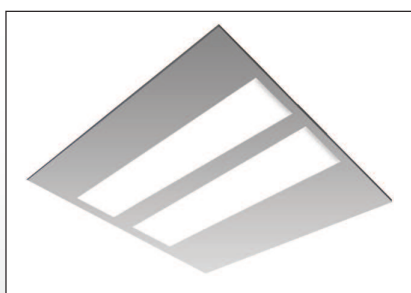
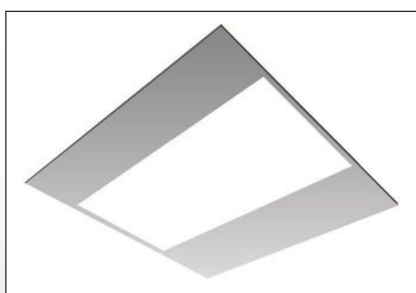



ODCS

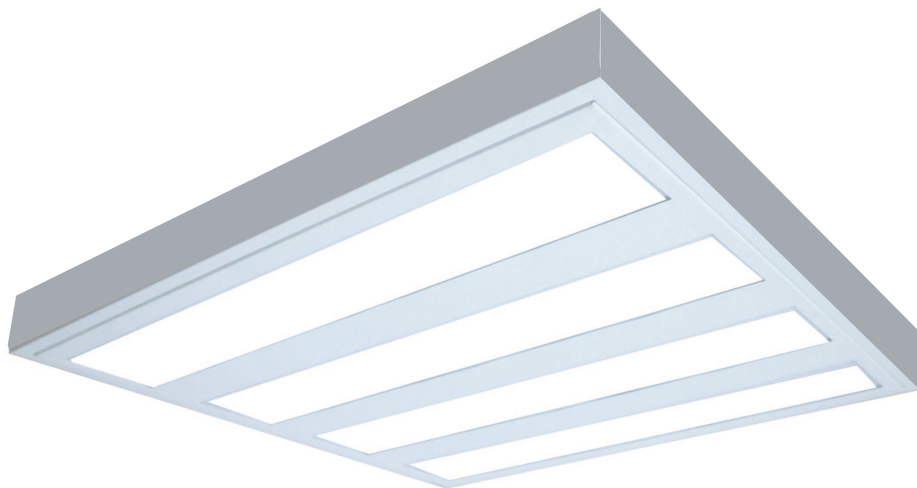


PRODUCT CODES				
	ODCS1- 3380/26	ODCS2- 2250/17	ODCS3- 3380/26	ODCS4- 4500/35
CONSTRUCTION:				
Housing & Optics:	In trimmed sheet steel, chemically treated surface to corrosion class II by high pressure spraying at 2.5 bar before its finally electrostatically powder coated with a 60 micron thermo-hardened polyurethane powder, stabilized and UV protected. Optics made of high temperature UV stabilized PMMA 3-layer material. Excellent optical characteristics with high transmission, diffusion rate, special micro embossing,and free static treatment.			
Mounting Device	Surface / Suspension Mounting			
Product Dimension (mm)	620 x 620 x 90	620 x 620 x 90	620 x 620 x 90	620 x 620 x 90
Product Color	RAL9016			
ELECTRICAL:				
Input Voltage	220-240V AC			
Frequency	50-60 Hz			
Power Factor	> 0.90			
Power Consumption	26W	17W	26W	35W
Power Consumption Tolerance	+/-10%			
Protection Class	Safety Class(II)			
Glow Wire Test	850 deg C /30 Sec			
CONTROLS:				
Dimmable	Optional			
Dimming Options (Variant)	Dali / 1-10V / Smart Controls			
PERFORMANCE:				
Luminaire Lumens	3200	2300	3500	4600
CCT	5000K (S) - 4000K / 3000K (O)			
CRI	>80			
Initial Chromacity	SCDM <3			
Lumen Maintenance	L80 / B10 > 90000hrs @ 25° C			
Operating Ambient Temperature	+10 to + 55° C			
Storage Temperature	-20 to + 80° C			
Ripple on Modules	<3%			
GENERAL:				
Ingress Protection	IP40			
Impact in Joules	IK03			
Replaceable Modules	Yes			
Luminaire Beam Angle	90 deg			
CE Markings	Yes			
Net Weight	2.2 Kgs	2.2 Kgs	2.2 Kgs	2.2 Kgs
VARIANTS:				
Available in 300 x 1220mm & 300 x 1520mm Linear Length also.				
(S) Standard (O) Optional upon request to be mentioned along with code of the product.				
Suspension Kit to be ordered separately using the code SK to the suffix of the product code.				
Note: Lumens, wattage & dimensions are subject to change due to the fast development in LED technology.				

How to Specify :

.....Lm and a min. oflm/w Surface
LED fixture made of Zinc coated steel, powder coated to corrosion class II with micro embossing PMMA diffuser and ENEC certified LED modules & driver, L80 / B10 > 90000hrs @ 25° C lumen maintenance,color temperature, IP40.

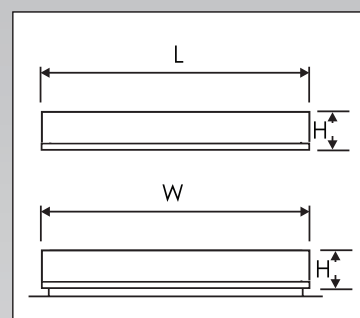

Luminous Intensity Distribution

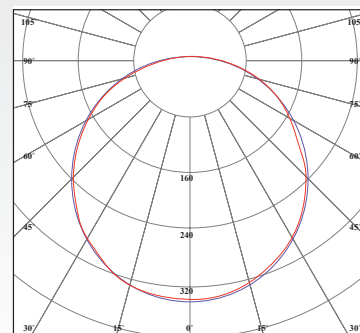

Luminous intensity (cd/klm) in level C 0° - 180°
Luminous intensity (cd/klm) in level C 90° - 270°