



## CSD

### TECHNICAL


Materials of Optics	PC
Materials of Housing	PC
Light Source	SMD (SCDM <3)
Color Temperature	3000K/ 4000K/ 5000K/ 5700K
Luminous Efficiency@4000K	120lm/W
CRI	≥80
Beam Angle(°)	120°
UGR	-
Lifetime(hr)	>50,000h
Product Finishing	White

### FEATURES & BENEFITS

LED Driver	Built-in
Dimming Option	Dali/1-10V
Functions	-
Ingress Protection (IP Rating)	IP54
Impact Resistance (IK Rating)	-
Power Factor (PF)	≥0.9
Certification	



### ACCESSORIES & DIMENSIONS

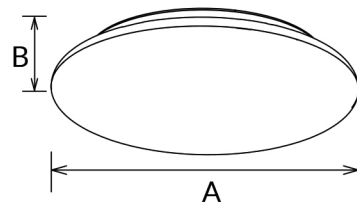

### MODEL REF.

Standard CCT 4000K

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBmm)	LUMEN(±5%)	N.W/pc(kgs)
CSD-18	18W	AC200-240W	300x40	2200	1.5
CSD-25	25W	AC200-240W	300x40	3000	1.5
CSD-30	30W	AC200-240W	300x52	3500	1.5