



# DLX

## TECHNICAL

Materials of Optics	PC
Materials of Housing	Die Cast Aluminium
Light Source	COB (SCDM <3)
Color Temperature	2700K/ 3000K/ 4000K/ 5000K
Luminous Efficiency@4000K	100lm/W
CRI	≥80
Beam Angle(°)	15°/24°/36°
UGR	-
Lifetime(hr)	>50,000h
Product Finishing	White


## FEATURES & BENEFITS

LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Functions	-
Ingress Protection (IP Rating)	IP20
Impact Resistance (IK Rating)	-
Power Factor (PF)	≥0.9

### Certification



## ACCESSORIES & DIMENSIONS

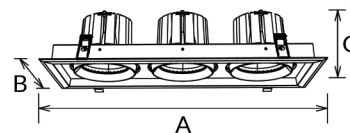

## MODEL REF.

Standard CCT 4000K

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	CUT-OUT(mm)	LUMEN(±5%)	N.W/pc(kgs)
DLX-30	30W	AC220-240V	175x175x110	160-160	3100	1.25
DLX-60	60W	AC220-240V	330x175x110	310-160	5800	2.25
DLX-90	90W	AC220-240V	475x175x110	455-160	8800	3.20