



LHB

TECHNICAL

Materials of Optics	PC Lens & Glass
Materials of Housing	Made of extruded aluminum alloy, chemically treated & polyester powder coated.
Light Source	SMD (SCDM <3)
Color Temperature	3000K/ 4000K/ 5000K/ 5700K
Luminous Efficiency	135 Lum/W
CRI	>80
Beam Angle(°)	60/90/120 deg
UGR	-
Lifetime(hr)	L80/B10 > 90000h
Product Finishing	Black


FEATURES & BENEFITS

LED Driver	Built-In
Dimming Option	Dali/1-10V
Functions	Power adjustable for different light outputs
Ingress Protection (IP Rating)	IP65
Impact Resistance (IK Rating)	IK10
Power Factor (PF)	> 0.90

Certification



ACCESSORIES & DIMENSIONS ES

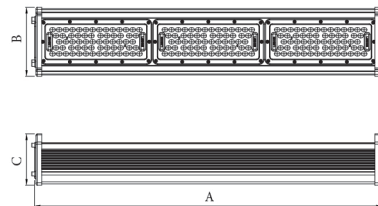

MODEL REF.

Standard CCT 5000K

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)
LHB-50	50W	220-240V AC	280x137x102	6750	1.9
LHB-100	100W	220-240V AC	480x137x102	13500	3.4
LHB-200	200W	220-240V AC	948x137x102	27000	6.9
LHB-240	240W	220-240V AC	1178x137x102	32400	5.7