

## LNS

### TECHNICAL



Materials of Optics	PC
Materials of Housing	Trimmed aluminium, chemically treated and electrostatically powder coated
Light Source	SMD (SCDM <3)
Color Temperature	3000K/4000K/5000K
Luminous Efficiency@4000K	140lm/w
CRI	≥80
Beam Angle(°)	90 Deg
UGR	-(Standard opal cover) <19/<22((Prismatic cover))
Lifetime(hr)	>50,000h
Product Finishing	White

### FEATURES & BENEFITS

LED Driver	Built-in
Dimming Option	DALI/ 0-10V
Functions	Power adjustable for different light outputs
Ingress Protection (IP Rating)	IP40/IP54/IP65
Impact Resistance (IK Rating)	IK06
Power Factor (PF)	≥0.9
Certification	



### ACCESSORIES & DIMENSIONS

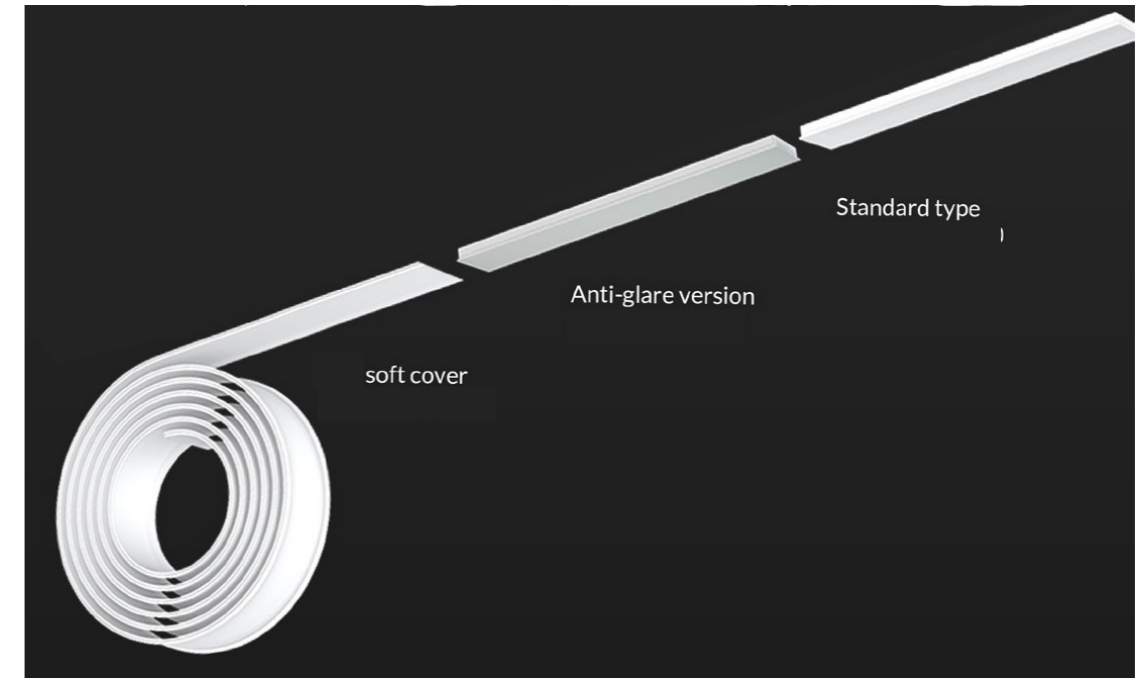

### MODEL REF.

Standard CCT 4000K

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)
LNS6560-17	17W	220-240V AC	583x65x80	2380	1.2
LNS6512-17	17W	220-240V AC	1160x65x80	2380	1.8
LNS6512-35	35W	220-240V AC	1160x65x80	4620	2.3
LNS6515-43	43W	220-240V AC	1460x65x80	6020	2.8
LNS8060-17	17W	220-240V AC	583x80x80	2380	1.2
LNS8012-17	17W	220-240V AC	1160x80x80	2380	1.8
LNS8012-35	33W	220-240V AC	1160x80x80	4620	2.3
LNS8015-43	43W	220-240V AC	1460x80x80	6020	2.8
LNS9560-17	17W	220-240V AC	583x95x80	2380	1.2
LNS9512-17	17W	220-240V AC	1160x95x80	2380	1.8
LNS9512-35	35W	220-240V AC	1160x95x80	4620	2.3
LNS9515-43	43W	220-240V AC	1460x95x80	6020	2.8

**Note : Other custom designs and dimensions are available up on request.**

