



## ODB

### TECHNICAL

Materials of Optics	PC
Materials of Housing	Trimmed sheet steel, chemically treated and electrostatically powder coated
Light Source	SMD (SCDM <3)
Color Temperature	3000K/4000K/5000K/5700K
Luminous Efficiency@4000K	100lm/W
CRI	>80
Beam Angle(°)	130°
UGR	
Lifetime(hr)	>50,000h
Product Finishing	White


### FEATURES & BENEFITS

LED Driver	Built-In
Dimming Option	Dali/1-10V
Functions	-
Ingress Protection (IP Rating)	IP40
Impact Resistance (IK Rating)	IK08
Power Factor (PF)	> 0.90

#### Certification



### ACCESSORIES & DIMENSIONS

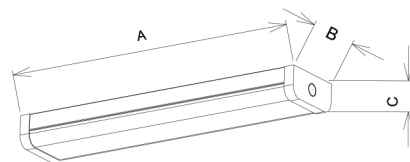

### MODEL REF.

Standard CCT 4000K

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)
ODB-60-20	20W	220-240V AC	600x124x60	2000	1.18
ODB-120-38	38W	220-240V AC	1200x124x60	3800	2.14
ODB-150-50	50W	220-240V AC	1500x124x60	5000	2.71
ODB-150-60	60W	220-240V AC	1500x124x60	6000	2.71