



ODC

TECHNICAL


Materials of Optics	PC
Materials of Housing	Trimmed sheet steel, chemically treated and electrostatically powder coated
Light Source	SMD (SCDM <3)
Color Temperature	3000K/4000K/5000K/5700K
Luminous Efficiency@4000K	110 Lum/W
CRI	>80
Beam Angle(°)	90 deg
UGR	
Lifetime(hr)	>50,000h
Product Finishing	White

FEATURES & BENEFITS

LED Driver	Built-In
Dimming Option	Dali/1-10V
Functions	
Ingress Protection (IP Rating)	IP44
Impact Resistance (IK Rating)	IK10
Power Factor (PF)	> 0.90
Certification	



ACCESSORIES & DIMENSIONS

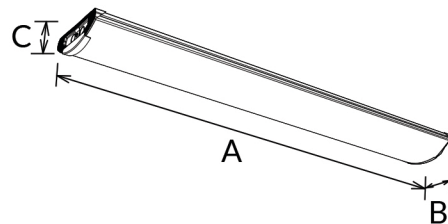

MODEL REF.

Standard CCT 4000K

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)
ODC60-17	17W	220-240V AC	595x171x63	1870	1.55
ODC120-30	30W	220-240V AC	1195x171x63	3300	2.88
ODC120-40	40W	220-240V AC	1195x171x63	4400	2.88
ODC150-36	36W	220-240V AC	1495x171x63	3960	3.52
ODC150-50	50W	220-240V AC	1495x171x63	5500	3.52