


# ODR

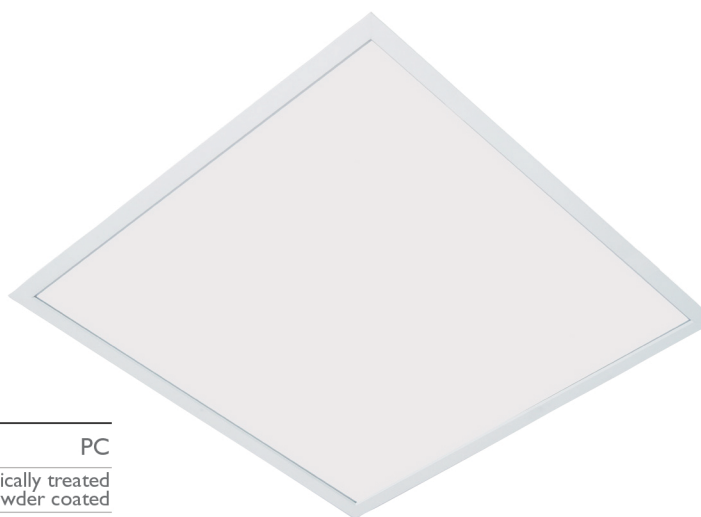

## TECHNICAL

Materials of Optics	PC
Materials of Housing	Trimmed sheet steel, chemically treated and electrostatically powder coated
Light Source	SMD (SCDM <3)
Color Temperature	3000K/4000K/5000K
Luminous Efficiency@4000K	140lm/w
CRI	>80
Beam Angle(°)	90 deg
UGR	
Lifetime(hr)	L80/B10 > 90000hrs @ 25°C
Product Finishing	White


## FEATURES & BENEFITS

LED Driver	Built-In
Dimming Option	Dali/1-10V
Functions	Power adjustable for different light outputs
Ingress Protection (IP Rating)	IP40/IP54/IP165
Impact Resistance (IK Rating)	IK03
Power Factor (PF)	> 0.90

### Certification



## ACCESSORIES & DIMENSIONS



## MODEL REF.

Standard CCT 4000K

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)
ODR3030-13	13W	220-240V AC	297x297x90	1340	2.3
ODR6060-26	26W	220-240V AC	597x597x90	3600	4.2
ODR6060-39	39W	220-240V AC	597x597x90	4682	4.2
ODR30120-39	39W	220-240V AC	297x1197x90	4682	4.2
ODR30150-43	43W	220-240V AC	297x1467x90	5630	5.3
ORD60120-78	78W	220-240V AC	597x1197x90	9300	8.4
ODR60120-105	105W	220-240V AC	597x1197x90	11500	8.4

Note: IP54/65 options are available upon request. Add suffix IP54/65 to above codes.