

ODRF

TECHNICAL

Materials of Optics	PC
Materials of Housing	Trimmed sheet steel, chemically treated and electrostatically powder coated
Light Source	SMD (SCDM <3)
Color Temperature	3000K/ 4000K/ 5000K/ 5700K
Luminous Efficiency@4000K	100/130 lm/W
CRI	≥80
Beam Angle(°)	90°/120°
UGR	<22(<19 for option)
Lifetime(hr)	>50,000h
Product Finishing	White




FEATURES & BENEFITS

LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Functions	-
Ingress Protection (IP Rating)	IP40/IP65
Impact Resistance (IK Rating)	-
Power Factor (PF)	≥0.9

Certification



ACCESSORIES & DIMENSIONS

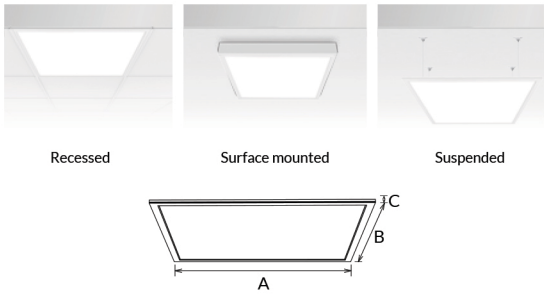

MODEL REF.

Standard CCT 4000K - IP40

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	CUT-OUT(mm)	LUMEN(±5%)	N.W/pc(kgs)
ODRF3030-18	18W	AC220-240V	295x295x9	280x280	120	0.85
ODRF3060-20	20W	AC220-240V	595x295x9	580x280	120	1.35
ODRF30120-33	33W	AC220-240V	1195x295x9	1180x280	120	2.40
ODRF30120-42	42W	AC220-240V	1195x295x9	1180x280	120	2.40
ODRF6060-25	25W	AC220-240V	595x595x9	595x595x9	130	2.35
ODRF6060-33	33W	AC220-240V	595x595x9	580x580	120	2.35
ODRF6060-42	42W	AC220-240V	595x595x9	580x580	120	2.35
ODRF60120-60	60W	AC220-240V	1195x595x9	1180x580	120	5.30