


ODS20

TECHNICAL

Materials of Optics	PMMA
Materials of Housing	Trimmed sheet steel, chemically treated and electrostatically powder coated
Light Source	SMD (SCDM <3)
Color Temperature	3000K/4000K/5000K/5700K
Luminous Efficiency@4000K	110lm/W
CRI	≥80
Beam Angle(°)	90 deg
UGR	-
Lifetime(hr)	>50,000h
Product Finishing	White

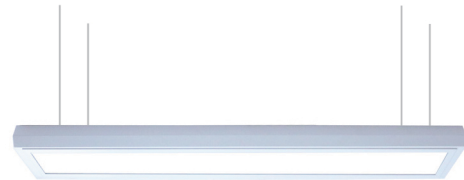


FEATURES & BENEFITS

LED Driver	Built-in
Dimming Option	Dali/1-10V
Functions	Power adjustable for different light output
Ingress Protection (IP Rating)	IP44
Impact Resistance (IK Rating)	-
Power Factor (PF)	≥0.9
Certification	



ACCESSORIES & DIMENSIONS ES

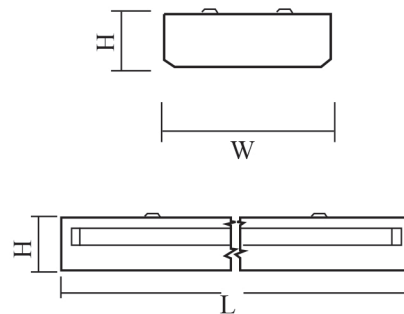

MODEL REF

Standard CCT 4000K

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)
ODS60-17	17W	AC220-240V	595x171x63	1800lm	1.55
ODS120-30	36W	AC220-240V	1195x171x63	3300lm	2.88
ODS120-40	40W	AC220-240V	1195x171x63	4100lm	2.88
ODS150-40	40W	AC220-240V	1495x171x63	4100lm	3.52
ODS150-50	50W	AC220-240V	1495x171x63	5300lm	3.52