

PLT

TECHNICAL

Materials of Optics	PC/Glass
Materials of Housing	Trimmed aluminium, chemically treated and electrostatically powder coated
Light Source	SMD (SCDM <3)
Color Temperature	3000K/4000K/5000K/5700K
Luminous Efficiency@4000K	140 Lum/W
CRI	>80, >90, >97
Beam Angle(°)	90 deg
UGR	
Lifetime(hr)	>50,000h
Product Finishing	White/Black




FEATURES & BENEFITS

LED Driver	Built-In
Dimming Option	Dali/1-10V
Functions	
Ingress Protection (IP Rating)	IP20
Impact Resistance (IK Rating)	IK03
Power Factor (PF)	> 0.90
Certification	



ACCESSORIES & DIMENSIONS

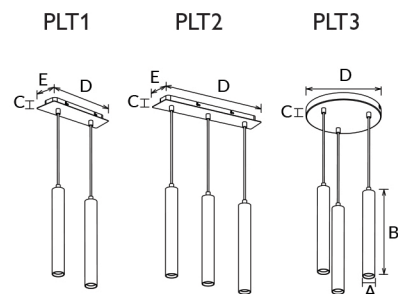

MODEL REF.

Standard CCT 4000K

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)
PLT1-10	10W	220-240V AC	39x300x26	1100	1.20
PLT2-15	15W	220-240V AC	39x300x26	1650	1.80
PLT3-15	15W	220-240V AC	39x300x25	1650	1.80