

RLTC

TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminium
Light Source	COB (SCDM <3)
Color Temperature	3000K/ 4000K/ 5000K/ 5700K
Luminous Efficiency@4000K	100 Lum/W
CRI	>80
Beam Angle(°)	15/36 deg
UGR	-
Lifetime(hr)	>50,000h
Product Finishing	White/Black


FEATURES & BENEFITS

LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Functions	-
Ingress Protection (IP Rating)	IP20
Impact Resistance (IK Rating)	IK06
Power Factor (PF)	> 0.90

Certification



ACCESSORIES & DIMENSIONS

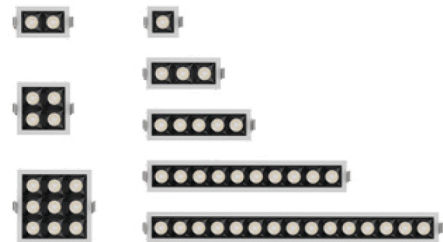

MODEL REF.

Standard CCT 4000K

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)
RLTC-4	4W	220-240V AC	45×45×42 37×37	400	0.12
RLTC-6	6W	220-240V AC	76×45×51 68×37	600	0.16
RLTC-9	9W	220-240V AC	105×45×51 97×37	900	0.21
RLTC-11	11W	220-240V AC	75×75×51 67×67	1100	0.22
RLTC-13	13W	220-240V AC	147×45×51 139×37	1300	0.27
RLTC-23	23W	220-240V AC	105×105×51 97×97	2300	0.43
RLTC-25	25W	220-240V AC	280×45×51 272×37	2500	0.51
RLTC-37	37W	220-240V AC	413×45×51 405×37	3700	0.71