



## RLTS

### TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminium
Light Source	SMD (SCDM <3)
Color Temperature	3000K/ 4000K/ 5000K/ 5700K
Luminous Efficiency@4000K	100 Lum/W
CRI	>80
Beam Angle(°)	70/90/100 deg
UGR	-
Lifetime(hr)	>50,000h
Product Finishing	White/Black


### FEATURES & BENEFITS

LED Driver	Built-out
Dimming Option	Triac/ DALI/ 0-10V
Functions	-
Ingress Protection (IP Rating)	IP20
Impact Resistance (IK Rating)	IK06
Power Factor (PF)	> 0.90

Certification



### ACCESSORIES & DIMENSIONS ES

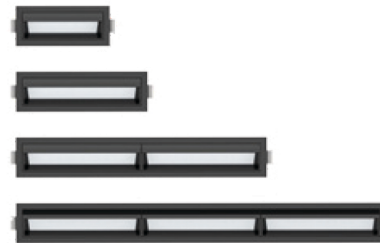

### MODEL REF. T

Standard CCT 4000K

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	CUT-OUT(mm)	LUMEN(±5%)	N.W/pc(kgs)
RLTS-9	9W	220-240V AC	105x45x55	97x37	900	0.21
RLTS-13	13W	220-240V AC	147x45x55	139x77	1300	0.27
RLTS-25	25W	220-240V AC	280x45x55	272x37	2500	0.51
RLTS-37	37W	220-240V AC	413x45x55	405x37	3700	0.70