



SLC

TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminium
Light Source	SMD (SCDM <3)
Color Temperature	3000K/4000K/5000K/5700K
Luminous Efficiency@4000K	140 Lum/W
CRI	>80
Beam Angle(°)	90 deg
UGR	
Lifetime(hr)	>50,000h
Product Finishing	White


FEATURES & BENEFITS

LED Driver	Built-In
Dimming Option	DALI/1-10V
Functions	
Ingress Protection (IP Rating)	IP20
Impact Resistance (IK Rating)	IK03
Power Factor (PF)	> 0.90

Certification



ACCESSORIES & DIMENSIONS

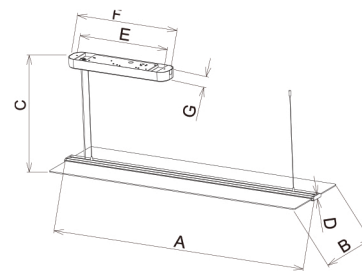

MODEL REF.

Standard CCT 4000K

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBxCmm)	LUMEN(±5%)	N.W/pc(kgs)
SLC-40	40W	220-240V AC	1200x350x1500	5500	4.50
SLC-60	60W	220-240V AC	1200x350x1500	8200	4.50