



SPT

TECHNICAL

Materials of Optics	PMMA/ PC
Materials of Housing	Die Cast Aluminium
Light Source	COB (SCDM <3)
Color Temperature	2700K/ 3000K/ 4000K
Luminous Efficiency@4000K	100lm/W
CRI	≥90
Beam Angle(°)	15°/20°/24°/36°/45°/50°/ 55°x36°x20°/22°x24°x5°
UGR	<19
Lifetime(hr)	50,000h
Product Finishing	Grey



FEATURES & BENEFITS

LED Driver	Built-out
Dimming Option	Triac/DALI/1-10V
Functions	-
Ingress Protection (IP Rating)	IP20/IP144
Impact Resistance (IK Rating)	-
Power Factor (PF)	≥0.9

Certification



ACCESSORIES & DIMENSIONS

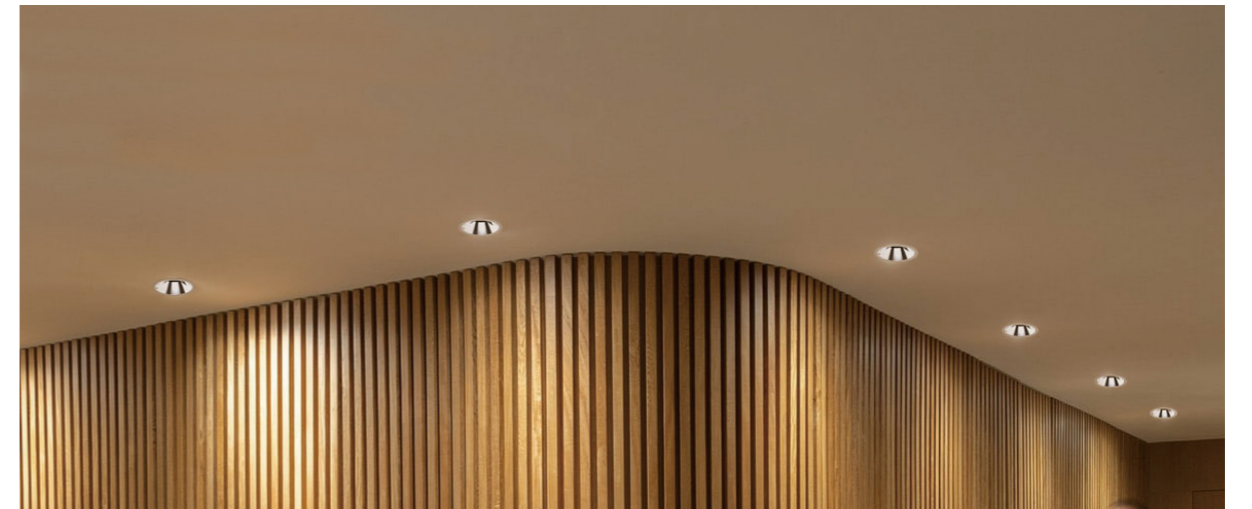

MODEL REF.

Standard CCT 4000K - Fixed

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBmm)	CUT-OUT(mm)	LUMEN(±5%)	N.W/pc(kgs)
SPT-55-4.5	4.5W	AC220-240V	62x67	55-57	350lm	0.19
SPT-55-8	8W	AC220-240V	62x67	55-57	550lm	0.19
SPT-75-7.5	7.5W	AC220-240V	82x85	75x77	650lm	0.29
SPT-75-10	10W	AC220-240V	82x85	75x77	800lm	0.29
SPT-75-12	12W	AC220-240V	82x85	75-77	950lm	0.29
SPT-75-15	15W	AC220-240V	82x85	75-77	1100lm	0.29
SPT-105-14	14W	AC220-240V	114x120	105-107	1750lm	0.70
SPT-150-30	30W	AC220-240V	154x174	150-152	3100lm	1.75

Note: Add suffix A for adjustable or/and S for square or/and T for trimless.