

UWP

TECHNICAL

Materials of Optics	PC
Materials of Housing	Aluminium
Light Source	SMD (SCDM <3)
Color Temperature	3000K/ 4000K/ 5000K/ 5700K
Luminous Efficiency@5000K	125 Lum/W
CRI	≥80
Beam Angle(°)	U04201, RO8401
UGR	-
Lifetime(hr)	>90,000h
Product Finishing	Black




FEATURES & BENEFITS

LED Driver	Built-in
Dimming Option	Dali/1-10V
Functions	-
Ingress Protection (IP Rating)	IP166
Impact Resistance (IK Rating)	IK08
Power Factor (PF)	>0.90

Certification



ACCESSORIES & DIMENSIONS

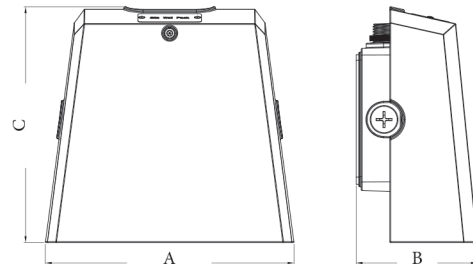

MODEL REF.

Standard CCT 4000K

CODE	WATT	INPUT VOLTAGE(V)	SIZE(AxBmm)	LUMEN(±5%)	N.W/pc(kgs)
UWP-10	10W	AC220-240V	196x96x186	1250	1.39
UWP-20	20W	AC220-240V	196x96x186	2500	1.44
UWP-30	30W	AC220-240V	196x96x186	3760	1.48
UWP-40	40W	AC220-240V	282x125x205	5000	2.82
UWP-70	70W	AC220-240V	282x125x205	8750	3.04